

Descripción

- ▶ Pantalla facial completa con diadema y visor transparente.
- ▶ Diadema ajustable.
- ▶ Medidas: 35x24 cm.
- ▶ 90% transmitancia luminosa.
- ▶ Protección contra partículas: solidez incrementada, con ensayo de impacto de una bola de 22 mm y una masa de 55 g a una velocidad de 5 m/sg.
- ▶ Extra protección: el visor incorpora guardas-plegues laterales que aumentan la superficie de protección.
- ▶ Resistente a grasas, soluciones acuosas de ácidos débiles, lejías, alcohol y algunos aceites.
- ▶ Resistencia al desgarre y al impacto óptima a temperatura ambiente.
- ▶ Grosor del visor: 0,5 mm.
- ▶ Inflamabilidad: en ninguna zona expuesta al exterior, banda de cabeza ni pantalla, se observa que el material se inflame ni continúe incandescente tras retirar la varilla de acero de la zona de ensayo.
- ▶ Protección contra gotas y salpicaduras de líquidos.



Materiales

- ▶ Copolímero de EVA (etil-vinilo-acetato) transformado por compresión
- ▶ Lámina extrusionada de polipropileno

Aplicaciones

- ▶ Resistencia a impactos
Contra salpicaduras de líquidos

Embalaje

- ▶ 1 ud / cajas de 50 uds


STANDARDS

EN 166



WWW.SAFETOP.NET



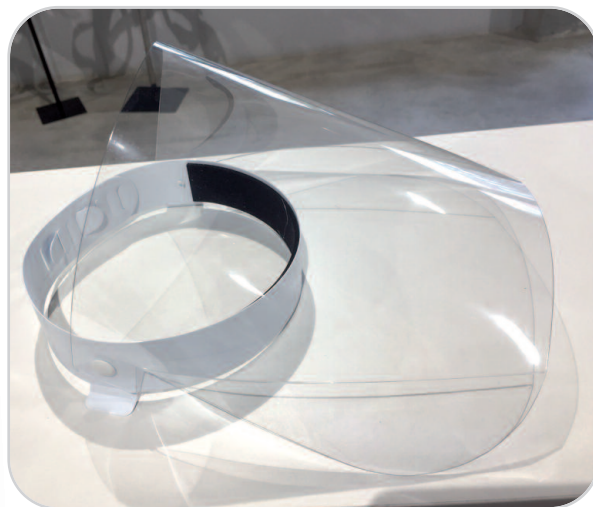

Description

- ▶ Full face shield with headgear and clear visor.
- ▶ Adjustable headgear.
- ▶ Measures: 35x24 cm.
- ▶ 90% light transmittance.
- ▶ Protection against particles: Increased robustness, with impact test of a 22 mm ball and a mass of 55 g at a speed of 5 m / sg.
- ▶ Extra protection: The visor incorporates side-fold guards that increase the protection surface.
- ▶ Resistant to greases, acids, alcohol and some oils.
- ▶ Optimum tear and impact resistance at room temperature.
- ▶ Thickness of the visor: 0,5 mm.
- ▶ Flammability: In any area exposed outside, headband or visor, material is not observed to ignite or continue to glow after removing the steel rod from the test area.
- ▶ Protection against drops and liquid splashes.



Materials

- ▶ EVA copolymer (ethyl vinyl acetate) transformed by compression
- ▶ Extruded polypropylene

Applications

- ▶ Resistance to impacts
Against liquid splashes

Packaging

- ▶ 1 pc / boxes of 50 pcs

STANDARDS

EN 166



WWW.SAFETOP.NET

