

- 1** Soporte para acoplar el visor
- 2** Brackets para acoplar el soporte al casco
- 3** Aro de aluminio

## Acoplable a cascos

### Descripción

- ▶ Protector facial verde DIN 5 con aro de aluminio, para acoplar a cascos Safetop SV, SP y SR, ER & AR-Series.
- ▶ Incluye el visor DIN5, el soporte y los brackets.
- ▶ Se puede colocar en posición de visera.
- ▶ Se estabiliza perfectamente en la cabeza del operario, pudiéndose abatir sin perder su posición
- ▶ Protección contra partículas a gran velocidad. Resistencia impacto medio de energía (120 m/s).
- ▶ Extremos de temperaturas (-5° a +55°C).
- ▶ Protección contra salpicaduras de líquidos.
- ▶ Clase óptica 1: válida para largos períodos de uso.
- ▶ Dimensiones del visor: 20x40 cm x 1 mm de grosor.
- ▶ Visor DIN 5, diseñado para labores de soldadura ligera, oxi-corte, soldadura de gas (flujo de acetileno <200 l/h), soldadura por arco (corriente <12A), microplasma (corrienteA), etc.
- ▶ Clase óptica 1: válido para largos períodos de uso.

## Materiales

- ▶ Visor de policarbonato. Aro de aluminio

## Aplicaciones

- ▶ **B-** Protección contra partículas a gran velocidad Impacto medio de energía (bala de 6 mm a 120 m/s)  
**EN170-** Protección contra rayos UV  
Escala del **ocular 2-5**, ideal para operaciones de soldadura de gas, soldaduras fuertes y operaciones de corte.
- T -** Extremos de temperaturas
- 3 -** Contra salpicaduras de líquidos

## Embalaje

- ▶ 1 ud / cajas de 50 uds

### REPUESTOS SUPERFACE COMBI GREEN (por ud)

SOPORTE	Ref. 79745
BRACKET	Ref. 79746
VISOR Din 5	Ref. 79355

\* Disponibles en diferentes colores

### + CASCOS COMPATIBLES (no incluido)

**SP-Series**  
Ref. 80610



**SR-Series**  
Ref. 80520



**SV-Series**  
Ref. 80620



**AR-SafetySeries**  
Ref. 80540



**ER-SafetySeries**  
Ref. 80530




## STANDARDS

**2-5 EN 166 1B T 3 (Protección individual de los ojos)**



WWW.SAFETOP.NET



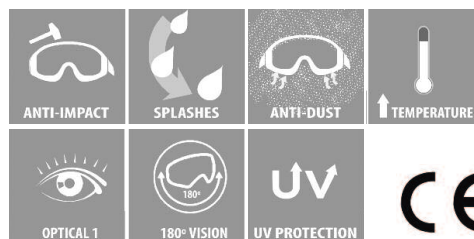

- 1** Carrier to fit the visor
- 2** Brackets to fit the carrier to the helmet
- 3** Alluminium bound

## To fit helmets

### Description

- ▶ Green face shield with DIN 5 visor and aluminium bound.
- ▶ To be used with Safetop helmets: SV, SP, SR, AR and ER-Series.
- ▶ It includes the carrier and the brackets.
- ▶ Folding carrier.
- ▶ Protection against particles.
- ▶ Protection against liquid splashes and crop sprays.
- ▶ UV protection (EN 170).
- ▶ For gas welding, strong welding and cutting operations.
- ▶ DIN 5 visor, designed for light welding, oxyfuel, gas welding (acetylene flow <200 l / h), arc welding (current <12A), microplasma (current A), etc.
- ▶ Optical class 1: valid for long periods of use.
- ▶ Visor dimensions: 20x40cm x 1mm thick

## Materials

- ▶ Polycarbonate visor. Aluminium bound

## Applications

- ▶ **B-** Protection against high speed particles. Medium energy impact (ball of 6 mm - 120 m/s)
- EN170-** UV protection.
- Lens scale **2-5**, ideal for gas welding or cutting operations.
- T** - High temperatures
- 3** - Agains liquid splashes

## Packaging

- ▶ 1 pc / boxes of 50 pcs

### SPARE PARTS SUPERFACE COMBI GREEN (pc)

CARRIER	Ref. 79745
BRACKET	Ref. 79746
VISOR Din 5	Ref. 79355

### + COMPATIBLE HELMETS (not included)

\* Available in different colors

**SP-Series**  
Ref. 80610



**SR-Series**  
Ref. 80520



**SV-Series**  
Ref. 80620



**AR-SafetySeries**  
Ref. 80540



**ER-SafetySeries**  
Ref. 80530



## STANDARDS

### 2-5 EN 166 1B T 3 (Individual eye protection)



WWW.SAFETOP.NET

